


**REED FOR AIR JET LOOM**

**Publication number:** JP3199451  
**Publication date:** 1991-08-30  
**Inventor:** KUSHINO MAMORU; YUNO MAYUMI  
**Applicant:** ASAHI CHEMICAL IND  
**Classification:**  
**- international:** D03D49/62; D03D49/00; (IPC1-7): D03D49/62  
**- European:**  
**Application number:** JP19890335050 19891226  
**Priority number(s):** JP19890335050 19891226

[Report a data error here](#)

**Abstract of JP3199451**

**PURPOSE:** To obtain a reed saving consuming amount of pressurized air and having excellent stability of weft-inserting at high speed by setting air-converging angles satisfying specific conditions at both the parts of upper and lower jaws forming dents of a reed-introducing groove, setting an air-diffusing angle at an interior part and providing an edge part having a specific radius of curvature at the interior part. **CONSTITUTION:** Air-converging angles  $\theta_A$  and  $\theta_B$  satisfying relations of  $0 \text{ deg.} \leq \theta_A$ ,  $5 \text{ deg.} \leq \theta_B \leq 30 \text{ deg.}$  and  $\theta_A < \theta_B$  are set at an upper jaw part A and a lower jaw part B forming an introducing groove G in dents of a reed 1. Further, an air-diffusing angle  $\theta_C$  is set at an interior part C in said introducing groove G and simultaneously a radius of curvature of edge part on a main nozzle side in said interior taper part is made to  $\leq 0.02 \text{ mm}$  to increase air-converging effect and inhibit flying out of weft from the reed groove G.

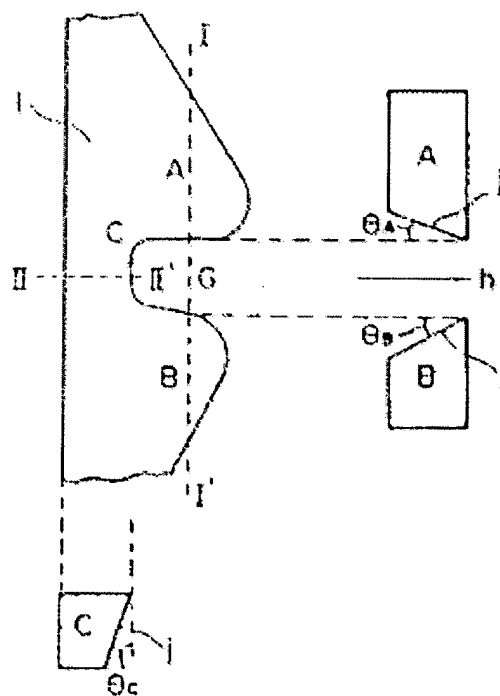

Data supplied from the **esp@cenet** database - Worldwide